

High Vacuum Filtration Systems




Model 1020.01.105 offers excellent performance at a very competitive price. The unit features a modified fan to produce a high suction force of 5" WC. Therefore, it is ideal for applications which require just one extraction hose or extraction tubes with a small diameter. The air inlet ports accommodate 2" and 2.5" diameter ducts. The three-stage filtration system consists of Pre/HEPA and Carbon filters.

Features and Benefits

- ✓ High suction force
- ✓ Three-stage filtration: Pre / HEPA and Carbon
- ✓ HEPA efficiency of 99.9% at 0.3 micron
- ✓ Large HEPA surface area due to mini-pleat construction
- ✓ Operates very quietly
- ✓ Connects to 2" and 2.5" dia. hoses

Filtration System

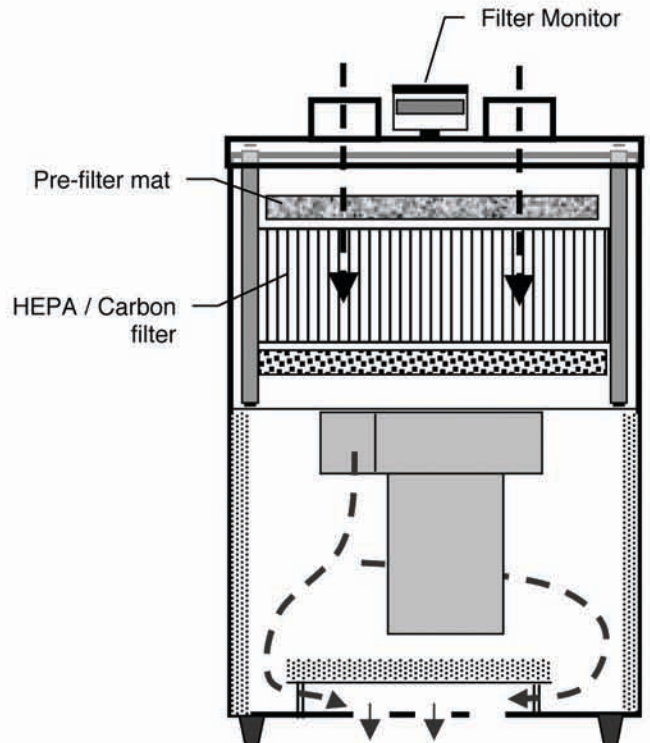

Controls and Filter Monitor

- ✓ Unit on/off switch
- ✓ Overload protection
- ✓ Filter monitor

Replacement Filters

- FIL0088 Pre-filter mat (6 /set)
- FIL0087 Combi filter: HEPA / Carbon

Specifications

Model 1020.01.105

No. of air inlet openings	2
Air inlet diameter	2.5"
Fan capacity	300 cfm
System capacity	150 cfm
Max. Static Pressure	5" WC
Power supply	115VAC, 60 Hz
Motor power	300 W
Noise level, approx.	60 dBA
Dimensions (w/d/h mm)	13.5" / 12.5" / 20"
Weight, approx.	33 lbs

Technical specifications are subject to change.